



## SOTIBLOC - Sélection 602C à 603C Fonte

**460 Nm**  
**Ø 30-35-38-40**

i = indice de réduction

n2 = vitesse de sortie avec  
moteur 4 poles (1400mn<sup>-1</sup>)

P = Puissance maximum  
en entrée avec Facteur de  
service = 1

**B**

M = Couple maximum en  
sortie avec Facteur de  
service = 1

**C**

= Montage avec douille de  
réduction

= Boite à bornes moteur  
décalée de 45 °


i	n1 = 1400 min <sup>-1</sup>			B5					B14					132
	n2 min <sup>-1</sup>	M (Nm)	P (kW)	63	71	80	90	100	56	63	71	80	90	
3,61	387,8	165	7,0		B									
4,23	331,0	200	7,2		B									
5,01	279,4	240	7,3		B									
6,07	230,6	270	6,8		B									
6,81	205,6	340	7,6		B									
7,96	175,9	370	7,1		B									
9,45	148,1	400	6,5		B									
11,43	122,5	400	5,3		B									
14,21	98,5	435	4,7		B									
16,62	84,2	501	4,6		B									
20,1	69,7	499	3,8		B									
24,98	56,0	435	2,7		B									
29,41	47,6	440	2,3		B									
35,58	39,3	499	2,1		B									
40,5	34,6	310	1,2		B									
44,23	31,7	435	1,5		B									
49	28,6	368	1,1		B									
60,9	23,0	435	1,1		B									

## SOTIBLOC - Sélection 602C à 603C Fonte

66,22	21,1	462	1,20	B							C	C		
71,01	19,7	496	0,97	B							C	C		
76,69	18,3	535	1,00	B							C	C		
82,3	17,0	392	0,83	B							C	C		
83,59	16,7	398	0,83	B							C	C		
92,78	15,1	441	0,85	B							C	C		
104,68	13,4	498	0,75	B							C	C		
117,22	11,9	409	0,67	B							C	C		
126,65	11,1	442	0,62	B							C	C		
135,74	10,3	319	0,51	B							C	C		
145,68	9,6	342	0,47	B							C	C		
157,4	8,9	369	0,44	B							C	C		
164,23	8,5	385	0,48	B							C	C		
185,23	7,6	435	0,38	B							C	C		
204,16	6,9	479	0,34	B							C	C		
224,18	6,2	526	0,35	B							C	C		
278,62	5,0	442	0,25	B							C	C		

## SOTIBLOC - Dimensions 602C à 603C Fonte

### Dimensions motoréducteur

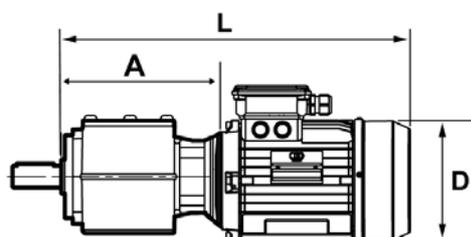


taille moteur	A	L	L frein H	L frein FHA	D
71	252.5	466	472	510	147
80	253.5	494	494	547	165
90S	254.5	511	511	563	181
90L	254.5	564	536	588	181
100	251.8	564	564	636	198
112	251.8	579	579	641	222






# SOTIBLOC - Dimensions 602C à 603C Fonte

## Diamètres d'arbres possibles



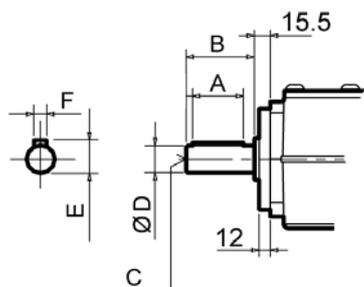


Ø axe D	A	B	C	E	F
30	50	60	M10*22	33	8
35	60	70	M10*22	38	10
38	60	70	M10*22	41	10
40	70	80	M10*22	43	12

## Dimensions fixation par pattes

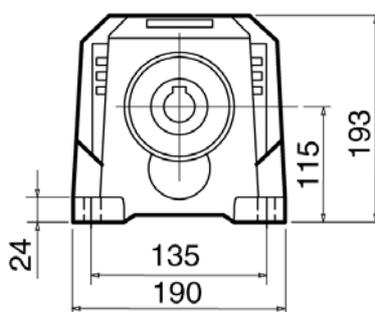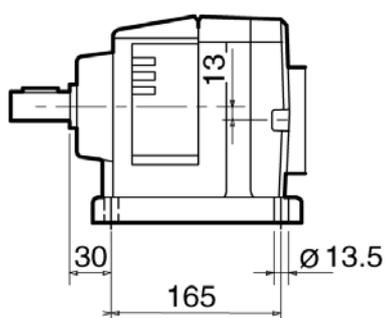

## Dimensions fixation par trous taraudés série " MN "

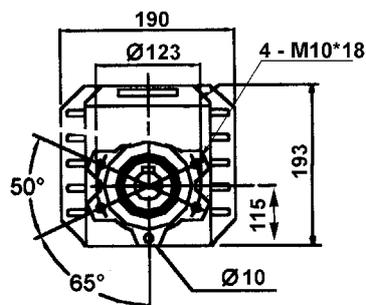

## Dimensions fixation par bride à trous lisses série " MX "

type	MXA	MXB	MXC
a1	160	200	250
b1	110	130	180
e1	130	165	215
c1	14	13	15.5
f1	3.5	3.5	4
S1	9	11	14

